




**Speciality Hotmelt Adhesives**



**IN TOUCH  
WITH YOUR  
NEEDS  
ALWAYS AND  
EVERWHERE**

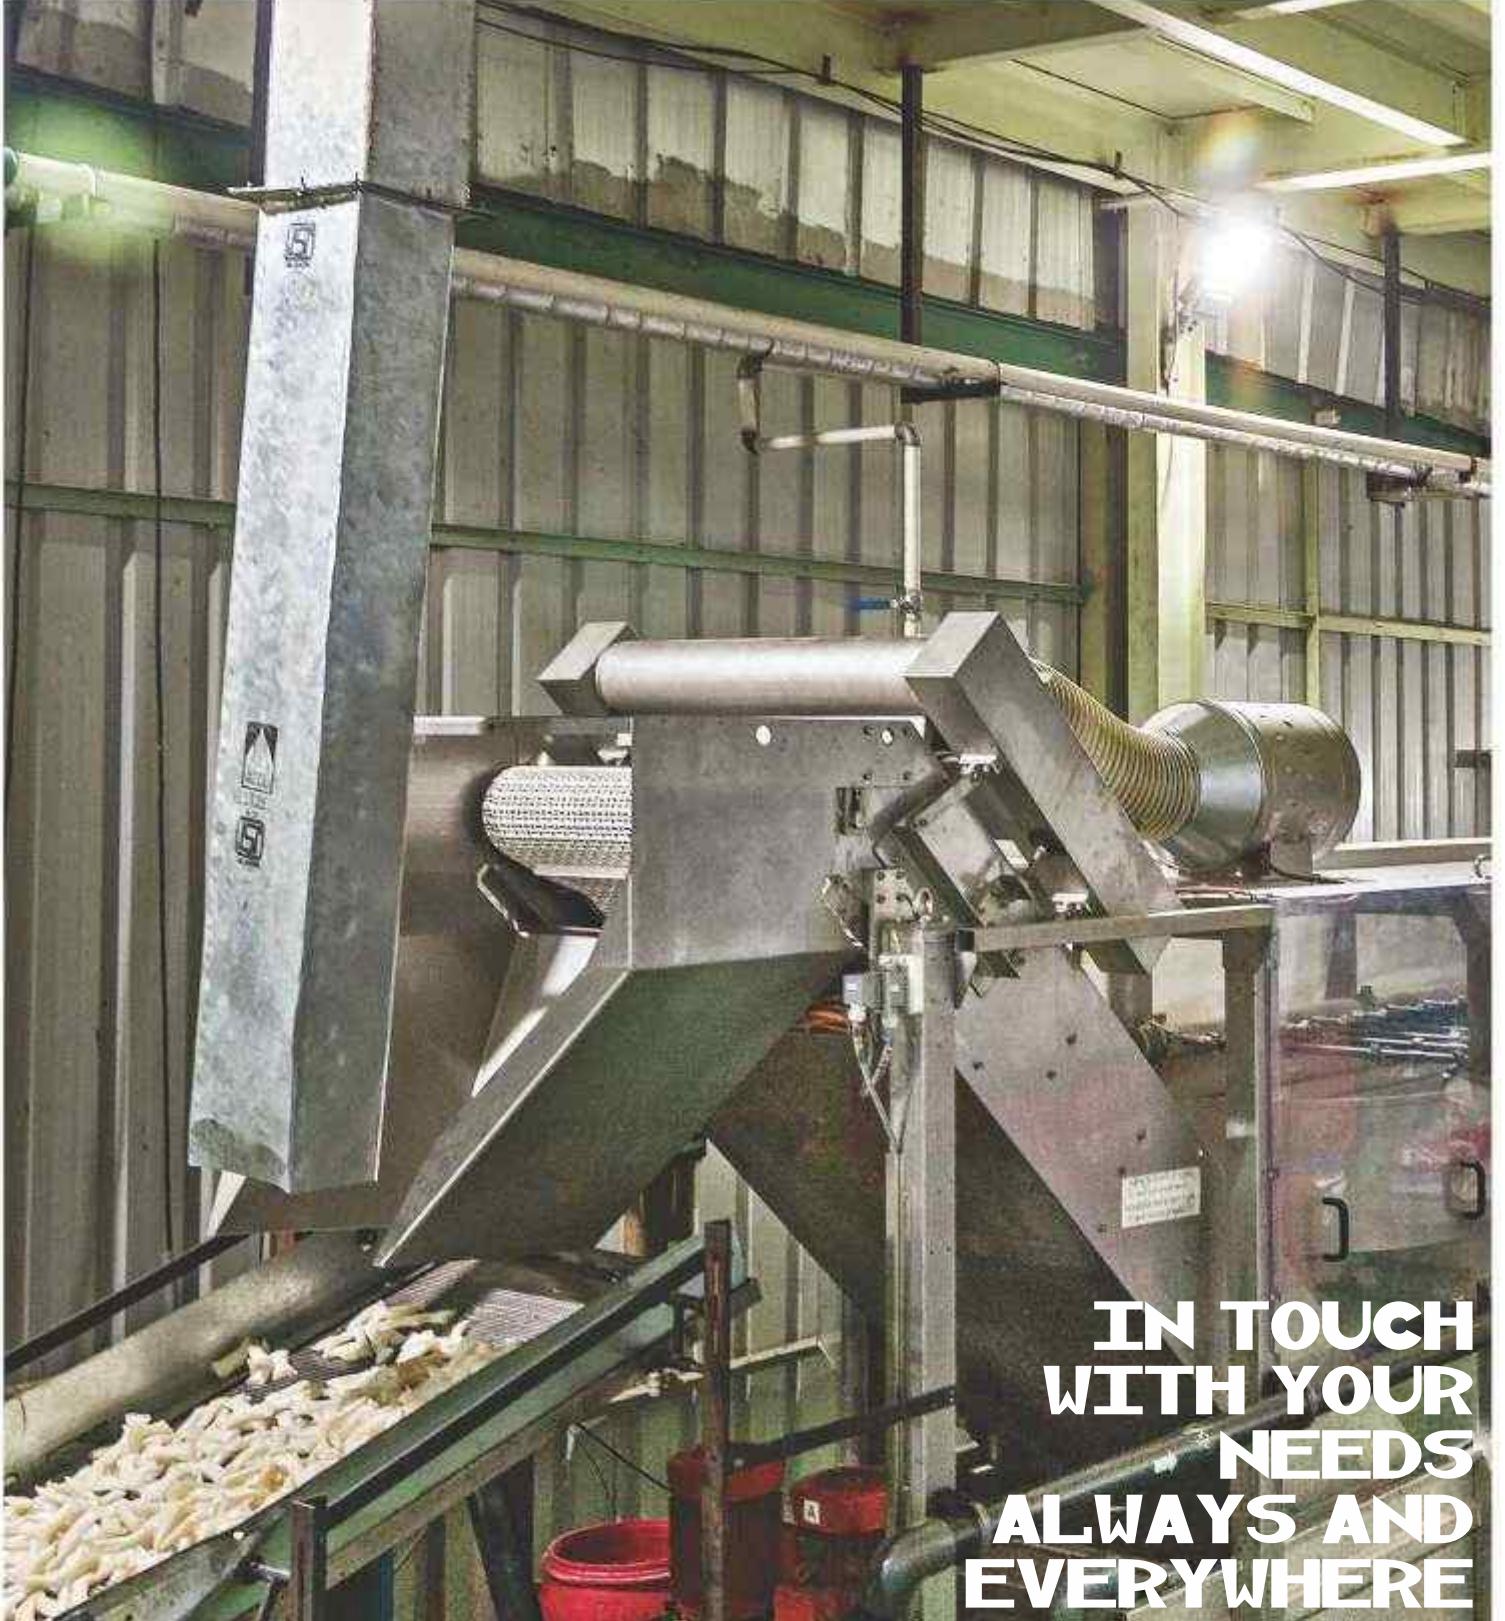

White Pillow-1kg



Widest array of over **500+** products

Global presence over **40+** countries

Strong & successful existence since **1990** in the industry

From a modest and humble beginning in 1990, CHEMLINE has emerged as one of the India's leading manufacturer and exporter of widest array of Industrial Adhesives, Coatings & Papers.

CHEMLINE INDIA LTD. manufactures a complete range of world class Adhesives and Coatings for Paper-Printing, Packaging and Converting, Flexible Packaging and Hygiene Industries, Labeling Adhesives for Breweries, Distilleries and Pharma Industries & Specialized Hot Melt Adhesives for vast range of applications, along with various downstream products like Self-Adhesive Label Stocks, Metallized Paper/Paper Boards, Coated Papers, Industrial Tapes.

Starting with its marketing activity in India, CHEMLINE has expanded into more than 40 countries including Europe & America and now has a wide network of distributors and agents all over the globe.

CHEMLINE possesses a very modern and green manufacturing installation with 'State of the Art' Facilities and Equipments for each range of products. The emphasis of the company is on 'Innovation' and therefore the core of the company is it's Research and Development.

# BONDING TOGETHER LOCALLY

## CERTIFICATIONS & COMPLIANCES



**Dr. Ravindra Goel**  
Chairman & Managing Director

## Giving New Dimensions To The Industry With Innovations

Under the leadership of Dr. Ravindra Goel, a Polymer Scientist, with Ph.D from IIT Delhi, Chemline has evolved into a globally recognized Indian brand. Dr. Goel possesses a deep understanding of emerging customer needs and remains actively involved in product development activities.

A dedicated team of professionals works relentlessly to deliver cost-effective, environmentally sustainable solutions. Dr. Ravindra Goel firmly believes in giving back to society. He is deeply engaged in supporting weaker sections of society.

## GLOBAL FOOTPRINTS

Owing to superior quality & competitive price, CHEMLINE exports its products to more than 40 countries. The products have been widely accepted and regularly exported to a number of corporate customer in:

- ▶ **The Middle East**
- ▶ **Europe**
- ▶ **North/South America**
- ▶ **South East Asia**
- ▶ **CIS**
- ▶ **Countries of Africa**

CHEMLINE products are supplied world-wide either directly to the customers or through our network of Agents and Distributors. Apart from above countries, CHEMLINE has marketing support offices in major metros in India to work closely with customers.

**CHEMLINE exports its products to more than **40** countries**



## SPECIALITY HOTMELT



# Hotmelt Adhesives for Air Filter assembly

Chemline provides Hot Melt adhesive for Airfilter / Mini pleat HEPA filter application for bonding of metalic mesh to various other filter media. Also suitable for filter papers, woven and nonwoven fabric, glass fiber paper media etc.

### S a l i e n t F e a t u r e s

Suitable for pleating equipment of different time and speed to meet requirement of different pleat gaps and for various filter media such as PP, Nylon, Polyester etc. Excellent toughness makes filter flexible and in shape. Good thermal resistance.



**Pleating Machine**



**Glue Lines**



**Air Filter Pleating**

### BRAND - QUIKLOCK®

### Technical Specifications

Applications	Grade	Characterstics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Air & Automotive Filter Assembly	<u>CH-9103 JY(3)</u>	Fire Retardant Application	Light Yellow Granules	$6500 \pm 1000$ cps	150 - 160 °C	$105 \pm 3$ °C
	<u>CH-9103 JY</u>	Quick bond formation results in higher production. Minimal Fume / Odor. Suitable for Filter applications for bonding of metallic mesh to various filter papers, woven and non-woven fabrics like PP, Nylon, Polyester.	Light Yellow Granules	$5000 \pm 500$ cps	150 - 160 °C	$105 \pm 3$ °C
	<u>CH-9103 JW</u>		Snow White Granules	$5000 \pm 1000$ cps	150 - 160 °C	$110 \pm 3$ °C
	<u>CH-190 AF</u>	For Cabin Filter Edge Banding	Snow White Granules	$15000 \pm 3000$ cps	150 - 180 °C	$115 \pm 3$ °C

## PACKAGING INDUSTRY

### Hotmelts for Packaging and Converting Industry



Chemline have hotmelt adhesives for Carton and Case Sealing. Also, we have hotmelts for Packaging and Converting of Ice-Cream and Frozen Foods segments. Constantly endeavouring ourselves in innovation, Chemline especially develops Metallocene based hotmelt. This high performance adhesives has the characteristics of low odur, no charring, no stringing, high strength which can save cost and create better efficiency for the customers.

### **S a l i e n t F e a t u r e s**

- Long / Short open time depends upon the applications
- Suitable for various hotmelt machines like Robatech, Valco Melton, Nordson etc.
- Good Thermal Stability
- Lower Energy Consumption
- Low Odour, Creating pleasant environment
- Reliable Operations
- Higher Mileage

BRAND - QUIKLOCK®				Technical Specifications				
Applications	Grade	Characteristics	Appearance	Viscosity @ 150 °C	Setting Time	Glue Pot Temperature	Softening Point	
Case & Carton Sealing for Food Products, Cable, Ceramics, Tissue Beverages & Breweries. Tray Packing.	CH 90 F12 (EVA Based) (Non-Laminated Substrates)	Superior bonding between paper to paper/ board. No string formation during usage.	Transparent Light Yellow Granules	1000 ± 200 cps @ 100Deg	< 1 Sec.	100 - 110 °C	92 ± 5 °C	
	CH-125 F12 (EVA Based) (Non-Laminated Substrates)		Light Yellow Granules	1000 ± 200 cps	< 1 Sec.	130 - 150 °C	110 ± 5 °C	
	CH-125 F12W (EVA Based)	It is non-charring after prolonged periods at 140°C. Less energy consumption due to low temperature. Excellent thermal stability. Higher mileage. Reliable operations.	White Granules	1000 ± 200 cps	< 1 Sec.	130 - 150 °C	110 ± 5 °C	
	CH-135 FMW (Metallocene based Non-Laminated Substrates)		Transparent Light Yellow Granules	1600 ± 400 cps	< 1 Sec.	150 - 170 °C	117 ± 3 °C	
	CH-135 WFM(8) (Metallocene Based)	All kinds of laminated / non-laminated substrates	Light Yellow Granules	2000 ± 500 cps	1-2 Sec.	160 - 180 °C	130 ± 5 °C	
Food Products, Pharma, Tissue Carton Sealing, Ice Cream Carton Flap & Side Sealing.	CH-135 (YBL) Rubber based (Laminated, METPET & LD Substrates)	Suitable for laminated, UV Coated & MET-PET Cartons. Performance across all climatic conditions (upto -30 °C) / laminated surfaces	Light Yellow Pillows	1700 ± 500 cps	4-5 Sec.	130 - 150 °C	82 ± 2 °C	
	CH-135 WFM(308) (Metallocene Based)		Light Yellow Granules	2000 ± 500 cps	1-2 Sec.	160 - 180 °C	130 ± 5 °C	
Paper Bag Handle Pasting	CH-9103 PB (Non-Laminated Substrates)	Superior bonding between paper to paper rope.	Light Yellow Granules	5000 ± 1000 cps	3-4 Sec.	150 - 160 °C	105 ± 3 °C	
	CH-9103 PB3 (Non-Laminated Substrates)		Light Yellow Granules	3000 ± 1000 cps	4-6 Sec.	140 - 160 °C	105 ± 3 °C	
	CH-135 YBL (3) (Non-Laminated Substrates)		Light Yellow Granules	2000 ± 5000 cps	4-5 Sec.	130 - 150 °C	98 ± 3 °C	
Glue Stick (250 mm length x 10 mm Dia.)	AC-35PB Cold Glue	Paper board cartons, fiber board boxes, crafts in home, coating label stock material for self adhesive labels.	Yellow White	5000 ± 1000 cps 25000 - 30000 cps	3-4 Sec.	160 - 190 °C	86 ± 5 °C 92 ± 5 °C	

## HOTMELT PRESSURE SENSITIVE ADHESIVE FOR VARIOUS APPLICATIONS



**Medical & Industrial Tapes**



**Label Stock & Holograms**



**FIBC Liner Attachment & Courier Bag Side Sealing**

Chemline Pressure Sensitive hotmelt adhesive have wide applications such as Label Stock, Holograms, Courier Bags, Medical Tapes, Industrial Tapes & Liner attachment in Jumbo / FIBC Bags Chemline have two types of hotmelt glue for Tapes i.e. Tamper Evident (Permanent type) and Peelable Sealing types.


### S a l i e n t F e a t u r e s

- Low Odour
- Stronger bond Strength
- Excellent Thermal Stability
- Suitable for spray and slot - die coatings
- No reduction in dry tack or storage both before and after use

BRAND - QUIKLOCK®		Technical Specifications				
Applications	Grade	Characteristics	Appearance	Viscosity @ 150 °C	Glue Pot Temperature	Softening Point
Label Stock/ Paper Tape	<u>CH-9028 PCB</u>	Smart Hot melt pressure sensitive adhesive meant for a variety of permanent labels and tapes .It can be applied by a roll coater or slot die nozzle.	Transparent Light Yellow Pillow/Brick	9000 $\pm$ 3000 cps	150 - 170 °C	90 $\pm$ 3 °C
Courier bag Holograms	<u>CH-9028 CB</u>	It gives fully Tamper Evident even on UV coating in Holograms & also suitable for Alu.Suitable for Pressure Sensitive Coating Applications	Transparent Light Brown Pillow / Brick	15,000 $\pm$ 3000 cps	140 - 180 °C	95 $\pm$ 3 °C
Industrial Tapes	<u>CH-9028 L12F(R)</u>	Suitable for Pressure Sensitive Coating Applications & It gives fully Tamper Evident even on UV coating in Holograms & also suitable for Alu. Tapes & HDPE Tapes.	Transparent Light Yellow Pillow / Brick	15000 $\pm$ 3000 cps	170 - 190 °C	95 $\pm$ 3 °C
Medical Tapes, Non-Woven Tapes & Cloth Tapes	<u>CH-9028 L3A</u>	It gives Full Paper Tear. Suitable for Pressure Sensitive coating in Industrial and Surgical Tapes.	Transparent Light Yellow Pillow / Brick	11000 $\pm$ 2000 cps	150 - 170 °C	92 $\pm$ 3 °C
	<u>CH-9028 L3 ZnO</u>	Speciality Pressure Sensitive hot melt adhesive for making medical cloth tapes containing zinc oxide.	White Pillow Brick	8000 $\pm$ 2000 cps		90 $\pm$ 5 °C
FIBC Liner Attachment	<u>CH-9028 L / W</u>	Suitable for Liner Pasting of Jumbo Bag (PP to LDPE)	Transparent Light Brown Pillow / Brick	5000 $\pm$ 1000 cps	150 - 170 °C	90 $\pm$ 2 °C
HMPSA Removable	<u>CH-9028 LRW</u>	Suitable for Removable/Peelable Applications. It can be used as a spray & coating.	Transparent Water White Pillow/Brick	8000 $\pm$ 2000 cps	150 - 170 °C	85 $\pm$ 5 °C
Label Stock/Paper Tape	<u>CH-9028 L 81</u>	Application For Label Stock	Transparent Light Yellow Bricks /Pillow	8000 $\pm$ 2000 cps	50 - 55 °C	92 $\pm$ 3 °C

Chemline provides a range of high performance, Exceptional Comfort and Cost-Effectiveness solutions of hotmelt Adhesives for nonwoven hygiene applications such as Baby Diapers, Feminine Care and Adult Incontinence.

## Hotmelt Adhesives for Sanitary Napkins, Diapers and Panty Liners

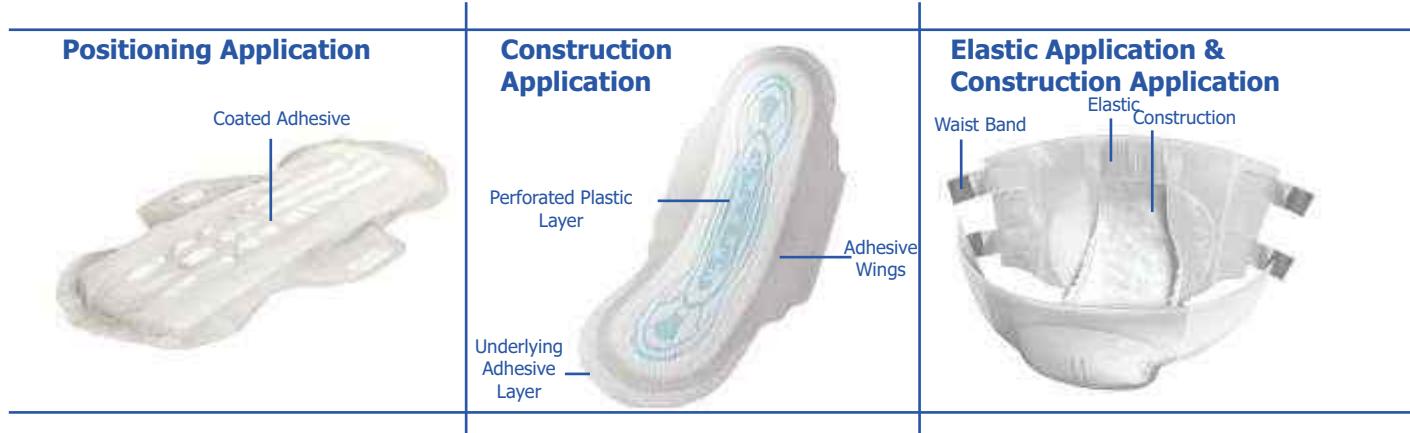

### S a l i e n t F e a t u r e s

- Low Odour
- Stronger bond Strength
- High Softness gives more comfortable fitting
- Excellent Thermal Stability
- Suitable for spray and slot - die coatings
- No reduction in dry tack or storage both before and after use

BRAND - QUIKLOCK®				Technical Specifications		
Applications	Grade	Characteristics	Appearance	Viscosity @ 150 °C	Glue Pot Temperature	Softening Point
Construction Adhesive	<u>CH-9028 LC3</u>	Suitable for Pressure Sensitive Coating & Spray Application in Diapers & Sanitary Napkins.	Transparent Light Yellow Pillows / Bricks	1000 ± 200 cps	150 - 170 °C	78 ± 2 °C
	<u>CH-9028 LCW</u>		Transparent Water White Pillows / Bricks	1200 ± 300 cps	150 - 170 °C	90 ± 3 °C
Positioning Adhesive	<u>CH-9028 LP3</u>		Transparent Light Yellow Pillows / Bricks	1500 ± 300 cps	150 - 170 °C	98 ± 3 °C
			Transparent Light Yellow Pillows / Bricks	7000 ± 2000 cps	150 - 170 °C	90 ± 3 °C
Sticking of Elastic Attachment in Diapers	<u>CH-9028 LE1</u>					

## BEVERAGE INDUSTRY

### Pet Bottle Labeling



Chemline hotmelt adhesives for bottle labelling has low viscosity which can be operated at low temperature and reduce label deformation. It has permanent tack that can bond label with less volume for various kind of plastic films and bottles such as PP, PET, HDPE. Also, we have adhesives for straw attachment on Tetrapack. It gives bonding on Polyester to Paper/Board.

### S a l i e n t F e a t u r e s

- Depend upon customer needs, we will provide Water White, White, Light Yellow adhesives
- Suitable for high speed machine like Krones, KHS, Siddle etc.
- No fibre formation during operation

BRAND - QUIKLOCK®			Technical Specifications			
Product	Grade	Characterstics	Appearance	Viscosity @ 150 °C	Glue Pot Temperature	Softening Point
PET Bottle Labelling- High Speed-Pot Filling, Contactless Labelling	CH-9026 THS (Machine Speed upto 720 BPM or more)	Strong bonding between PET to PP / PE Label, equally good performance even on wet labels. No fumes and fiber formation during operation. No reduction in dry tack on storage both before and after usage. It gives high coverage (about 15 gms on application area as this is high meltout & dry tack.	Transparent Water White Pillow / Brick	1000 ± 200 cps	140 - 160 °C	80 ± 2 °C
	CH-9026 THS4 (Machine Speed upto 400 BPM or more)		Transparent Water White Pillow / Brick	1000 ± 200 cps	140 - 160 °C	80 ± 2 °C
	CH-9026 THS9 (Machine Speed upto 400 BPM or more)		Transparent Water White Pillow / Brick	600 ± 200 cps	130 - 150 °C	75 ± 3 °C
	CH-9026 WMS (Machine Speed upto 200 BPM)		Transparent White Pillow / Brick	1000 ± 200 cps	140 - 160 °C	80 ± 2 °C
Tetra Pack Straw Pasting	CH-190 SB	Suitable for bonding on polyester/PE to paper/Board/Coated Paper. Not affected by extreme hot (40 °C) & cold (0 °C) environment.	Snow White Granules	2500 ± 500 cps	140 - 160 °C	87 ± 3 °C
Tetra Pack LID Fixing	CH-135 WFM(308) (Metallocene Based) All kinds of laminated / non-laminated substrates	Suitable for Laminated, UV Coated & MET-PET Cartons. Performance across all climatic conditions (upto -30 °C) / laminated surfaces	Light Yellow Granules	2000 ± 500 cps	160 - 180 °C	130 ± 5 °C



Tetra Pack – Lid Fixing



Tetra Pack – Straw Attachment

# HOTMELT ADHESIVES FOR MATTRESSES



Foam Assembly with HMPSA



Spring Pocket to Pocket Bonding

## S a l i e n t F e a t u r e s

- It gives strong bond between foam to fabrics in Mattresses
- Excellent thermal stability
- Most suitable for pressure sensitive coating / Spray application for interior bonding of Automotive & Mattresses.

BRAND - QUIKLOCK®				Technical Specifications		
Applications	Grade	Characterstics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Mattresses - Spring Pocket - Pocket Bonding	<u>CH-135 M6</u>	Most suitable for spring pocket to pocket bonding for nozzle application in mattress.	Light Yellow Granules	4000 $\pm$ 1000 cps	150 - 170 °C	N/A
Mattresses - Foam To Foam	<u>FF 3502 (S)</u> <u>35±1% Solid</u>	Most suitable for spring Foam to Foam bonding for nozzle application in mattress.	Light Yellow Viscous Liquid	100 $\pm$ 20 cps	N/A	N/A
Cold Glue Foam To Foam/Rubber/ Rexene/Metal	<u>FF5025 (w)</u> <u>52+2% Solid</u>	It Is Water Base Emulsion Used In Furniture Industry For Making Superior Quality Sofa, Chairs And Mattress	Milky White Viscous Liquid	10000 $\pm$ 2000 cps	N/A	N/A

# ASSEMBLY OF AUTOMOTIVE LAMPS, AUTOMOTIVE BATTERIES & INTERIOR WITH HOTMELT GLUE



BRAND - QUIKLOCK®				Technical Specifications			
Applications	Grade	Characterstics	Appearance	Viscosity @ 180°C	Application Temp	Softening Point	
Lead and other Plates to PPCP	CH 9028 F (Foamable Grade)	Suitable for Battery Inside Plates Assembly	Light Yellow (Pillow)	2800	160-180 °C	90 °C	
Lead and other Plates to PPCP	CH 9028 NF (Non Foamable)	Suitable for Battery Inside Plates Assembly	Off Yellow (Pillow)	2500	140-160 °C	90 °C	

## Advantages

No Metallic Impurity after Testing in Sulfuric Acid @ 70 °C for 7 days, High Spreadability, Better Bonding



BRAND - QUIKLOCK®				Technical Specifications		
Applications	Grade	Characterstics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Head / Tail Lamp Assembly	<u>CH-9028 HLG</u>	Suitable for sealing of reflector & transparent glass for head lamp/tail lamp in automotive industry.	Solid Grey/ Black Bricks	50,000 $\pm$ 10000 cps	180 - 200 °C	115 $\pm$ 3 °C
Automotive Foam Assembly	<u>CH-9028 HLG (9)</u>			50,000 $\pm$ 10000 cps	160 - 200 °C	130 $\pm$ 5 °C
Head / Tail Lamp Assembly	<u>CH-9028 HLB(9)</u>			50,000 $\pm$ 10000 cps	180 - 200 °C	130 $\pm$ 5 °C


## Salient Features

- It gives strong bonding between PC, PP, PMMA, ABC acrylate

## SPECIALITY HOTMELT



# Hotmelt Adhesives for WPP Bag Side Sealing

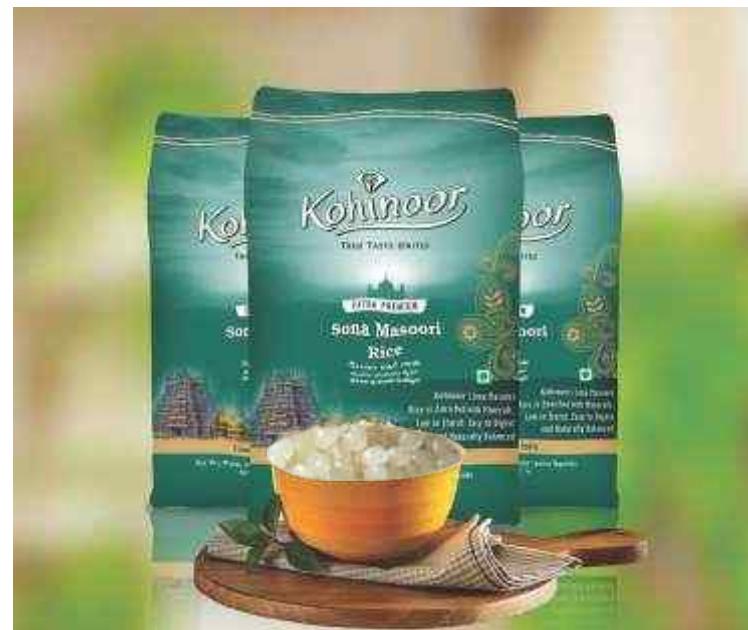

BRAND - QUIKLOCK®				Technical Specifications			
Applications	Grade	Characteristics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point	
WPP Bag Side Sealing	CH-9028 SSH9	Most suitable for side sealing of HDPE /PP Woven/BOPP Bags & Non-Woven Bags.	Off White Pillows	50,000 $\pm$ 5000 cps	170 - 190 °C	108 $\pm$ 3 °C	
	CH-9028 SSH12		Off White Pillows	50,000 $\pm$ 5000 cps	170 - 190 °C	135 $\pm$ 3 °C	

Glue Beading

## SPECIALITY HOTMELT

### Hotmelt Adhesives for Shoe Fabric Lamination

#### S a l i e n t   F e a t u r e s

Strong bonding between fabrics and EVA Foam. It can be used it for upper & insole manufacturing. Excellent thermal stability at 60 degree Celsius. Water resistance is good, if you dip it in water.

#### Foam to fabric Lamination

BRAND - QUIKLOCK®			Technical Specifications			
Applications	Grade	Characterstics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Shoe Fabric Lamination/Automotive Felt-Felt Application	<u>SFL-89 TY</u>	Lamination of fabrics to EVA Foam & other fabrics for industries such as shoe upper & Insole etc.	White Pillow	5500 ± 1000 cps	150 - 160 °C	90 ± 5 °C
Lamination/Automotive Felt-Felt Application	<u>SFL-89 TYL</u>	Non Woven To Non Woven Felt Bonding Plastic TO Plastic Substrate Bonding .	Light Yellow Brick	5500 ± 1000 cps	160 - 180 °C	100 ± 3 °C
For Shoe Inner Foam Pasting	<u>CH-9028W</u>	Grade is most suitable for pressure sensitive Coatings For Shoes application	Transparent Brick/Pillow	5000 ± 1000 cps	150 - 170 °C	90 ± 2 °C



## Anti - Skid Carpet Back Coating and Palletization


Chemline provides Hotmelt adhesives for antiskid carpets and palletization which is solvent free, easily processed, fast curing, slight coating, good washability, excellent antiskid performance.

### S a l i e n t F e a t u r e s

- It is non-sticky after de-palletizing. High thermostability and good flexibility. Suitable for Spray application.



BRAND - QUIKLOCK				Technical Specifications		
Applications	Grade	Characterstics	Appearance	Viscosity @ 150 °C	Glue Pot Temperature	Softening Point
Anti-Skid Palletisation	<u>AS - 3090 W</u>	Film of adhesive has got anti-skid properties. No String Formation during usage.	White Pillows/ Bricks	25,000 ± 5000 cps	150 - 180 °C	85 ± 3 °C
Asphalt Sheet Melt(Automotives)	<u>AS - 3090 WL</u>	Film of adhesive has got anti-skid properties.	White Pillows/ Bricks	8,000 ± 2000 cps	150 - 170 °C	85 ± 3 °C

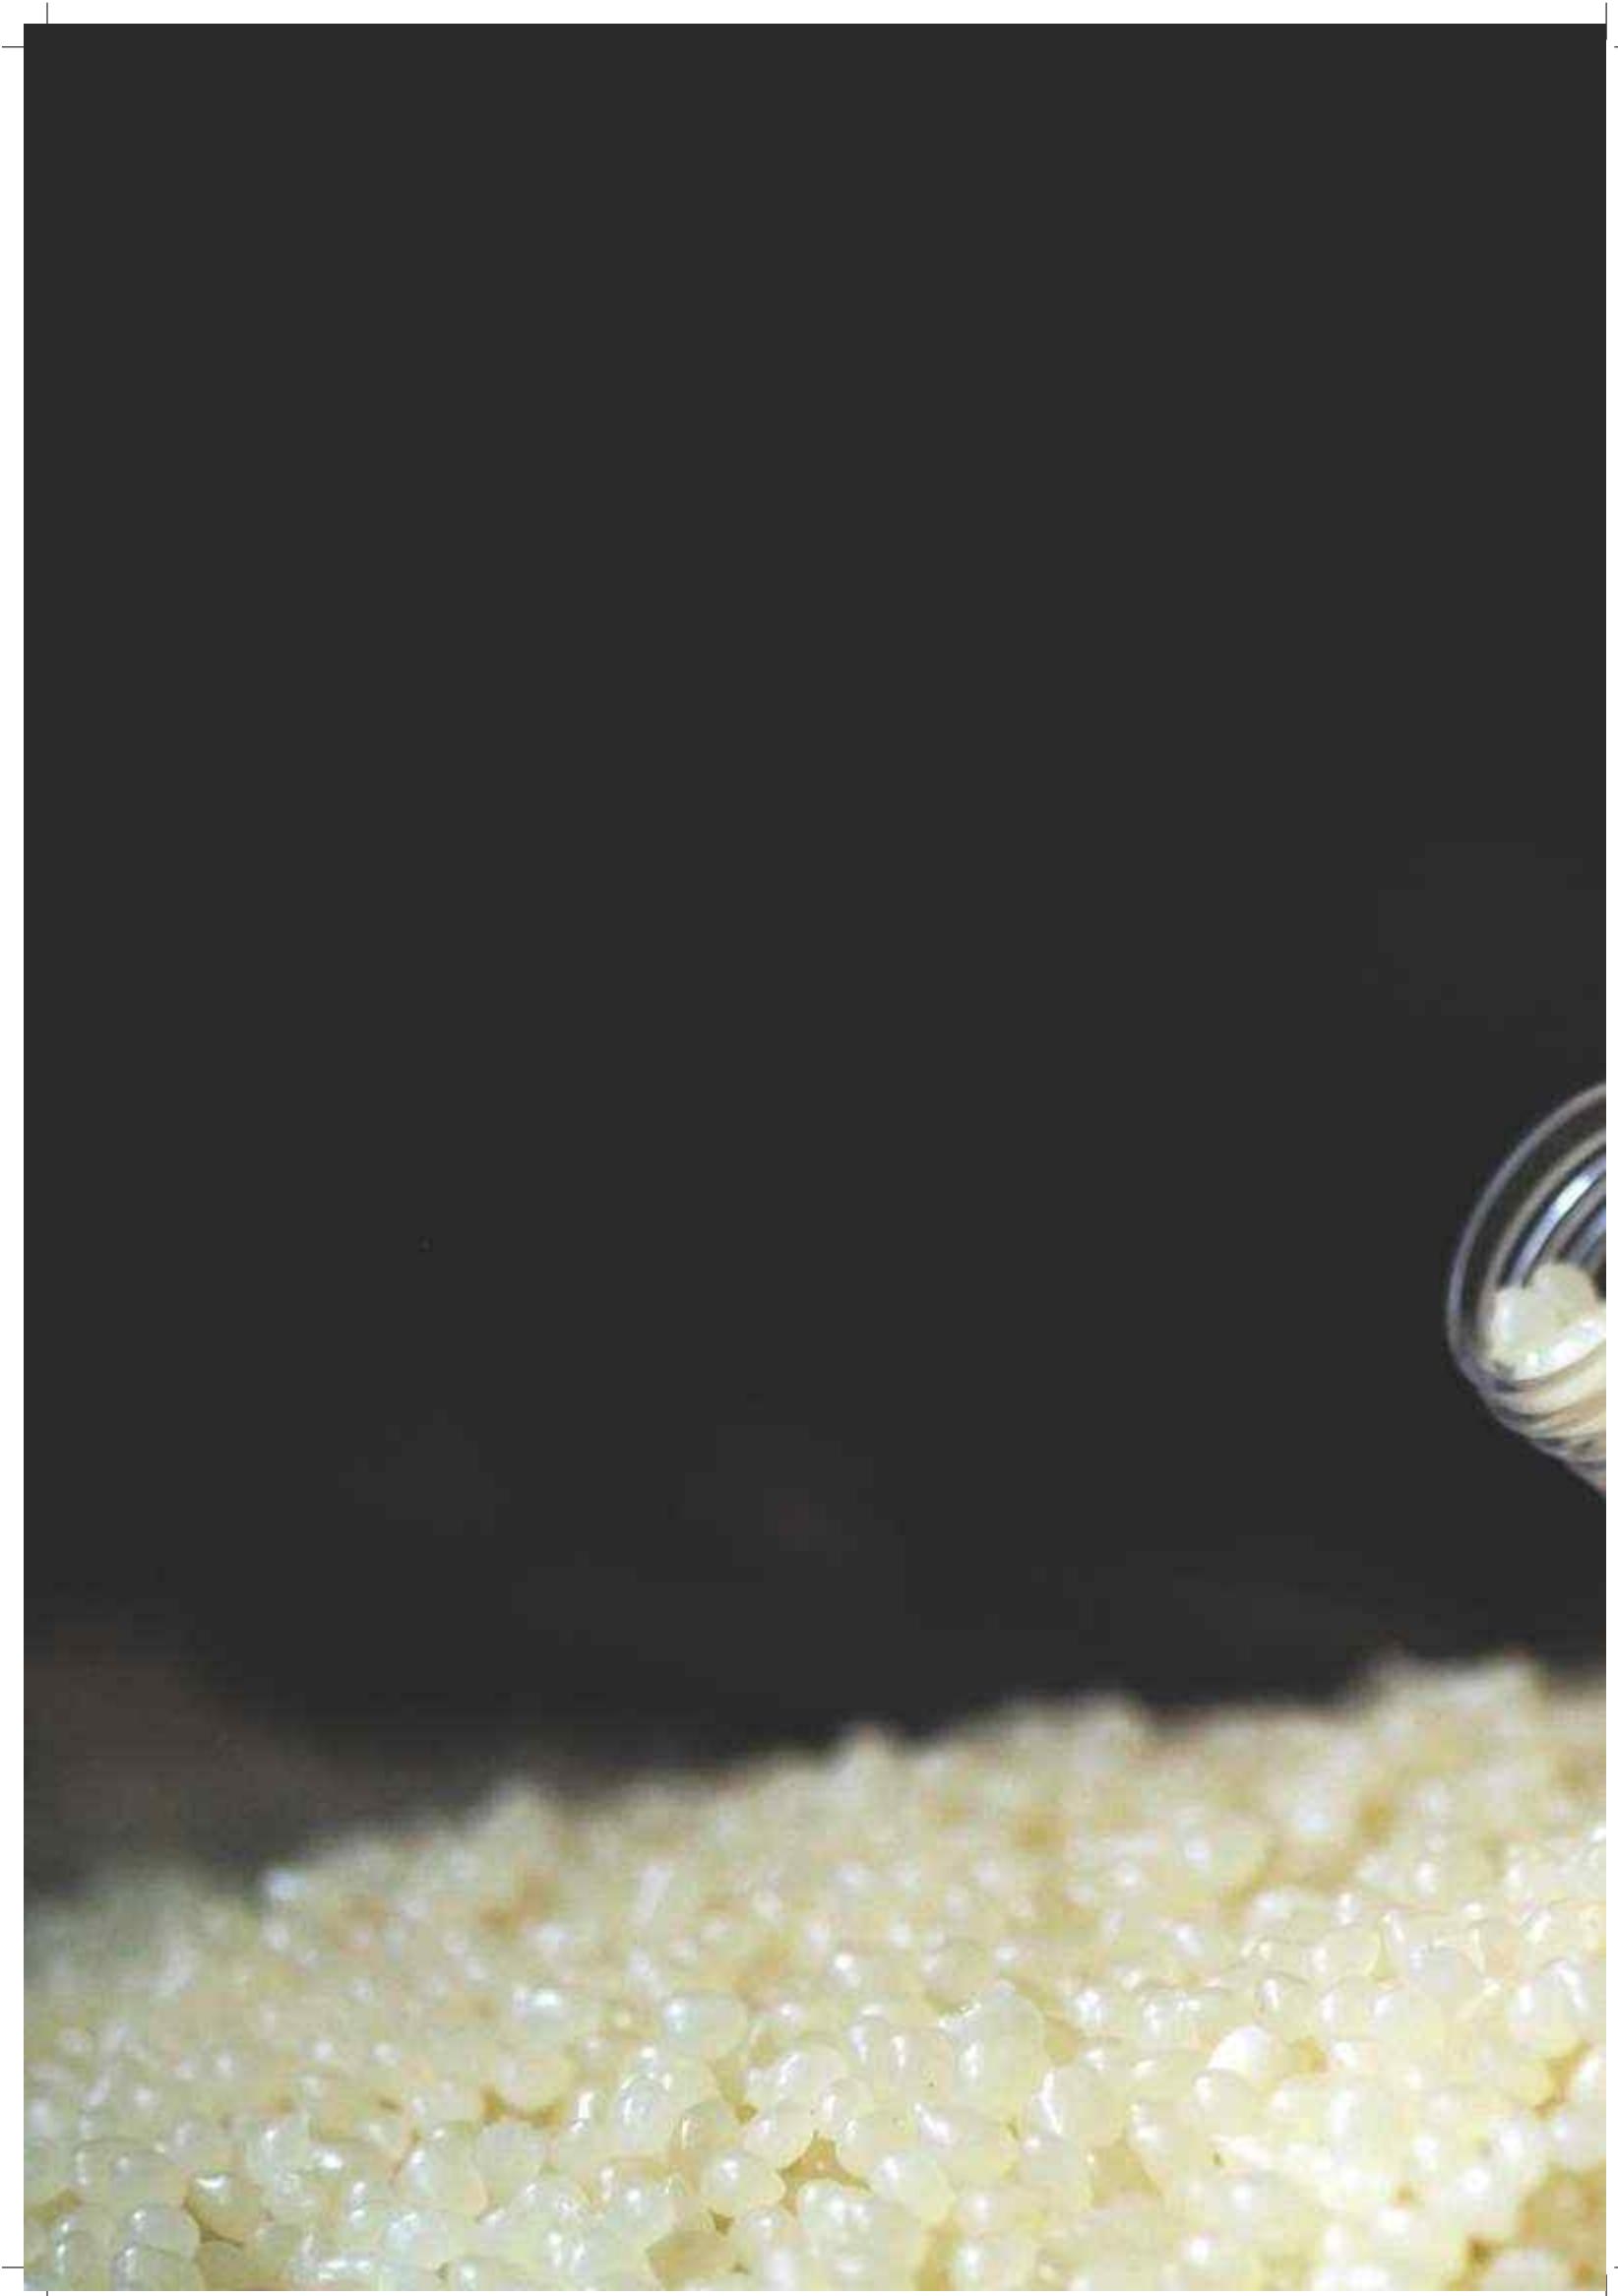



# EDGE BANDING FOR WOOD & CORE COMPOSER




## S a l i e n t F e a t u r e s

- Suitable for manual automatic edge banding machine
- High bonding and peel strength
- Immediate good re-melting behavior
- Unaffected with extreme hot climate

Chemline provides Hotmelt adhesives for manual and edge banding machines. It gives superior coverage, excellent finishing and long durable bond which is unaffected under extreme atmospheric conditions. It gives superior bonding with PVC, ABS on MDF or Particle Board.

BRAND - QUIKLOCK®			Technical Specifications			
Applications	Grade	Characterstics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Edge banding for Wood	CH-8530 WA	Suitable for strong bond between Wood to Leather / PVC / Fabric. Higher coverage.	Light Yellow Granules	25000 $\pm$ 5000 cps	150 - 170 °C	87 $\pm$ 5 °C
	CH-8540 WA Automatic		Light Ivory Granules	100000 $\pm$ 10000 cps	170 - 190 °C	87 $\pm$ 3 °C
Core Composer	CH-8520 WA Automatic	Suitable for strong bond between Wood to Nylon Fabric.	Off Yellow Granules	6000 $\pm$ 2000 cps	140 - 160 °C	81 $\pm$ 3 °C

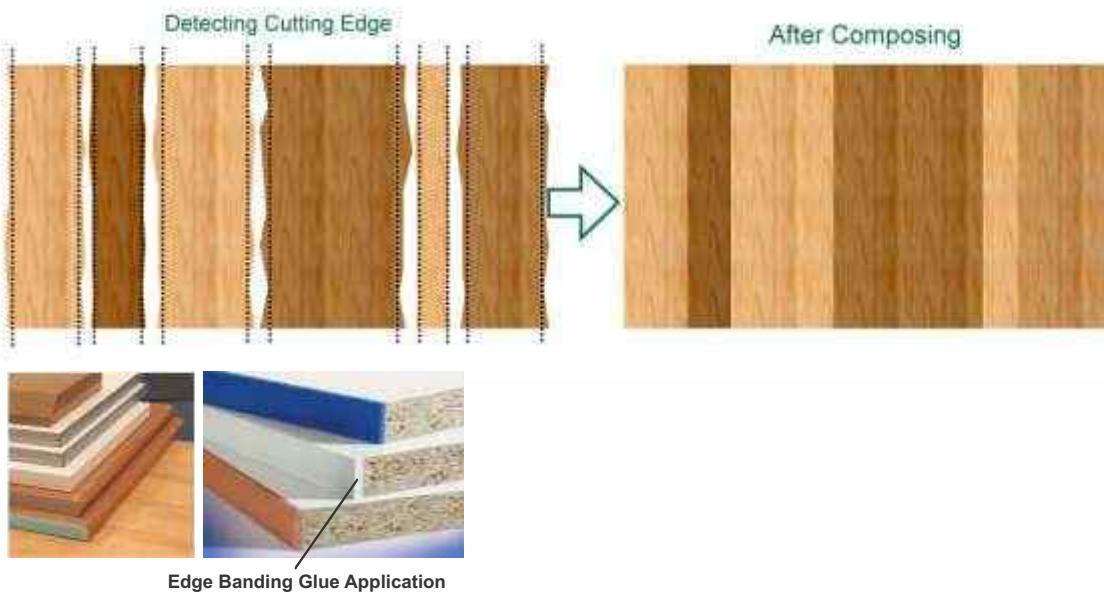

# HOTMELT ADHESIVES FOR VARIOUS APPLICATIONS



**Hot Foil Stamping**




**Geo Textiles**



**Soap Wrapper Coating**



**Shrink Sleeve Tube Making**

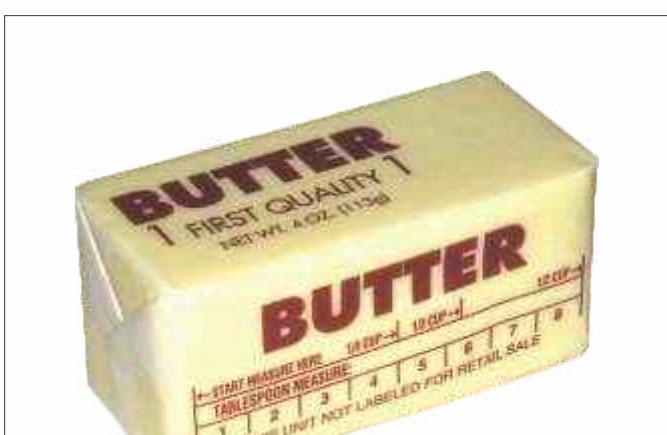


**Toffee Wrapping & Butter Packaging**




# HOTMELT PRESSURE SENSITIVE ADHESIVE FOR SPC FLOORING

## SPC Flooring Structure

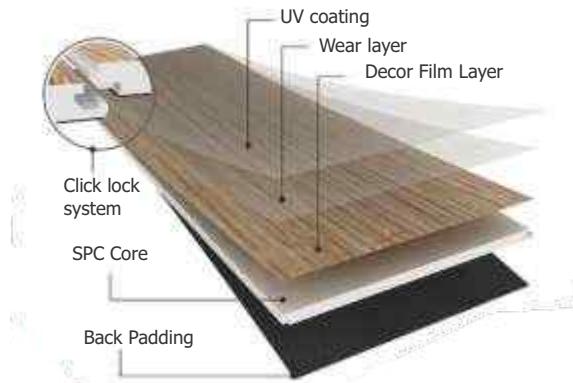

## Ceramic SPC Flooring Structure

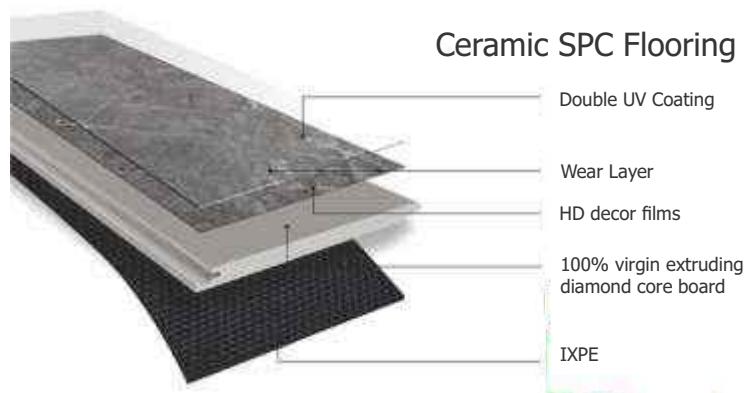

### Composition

- Durable UV Layer:** ensure superior stain-resistant and water-proof performance, saving maintenance costs
- Wear resistant transparent layer:** restore the authentic color and embossing, protecting it from abrasion
- HD Decorative Layer:** regardless of natural wood or stone structure, we offer a variety of pattern choices that will better showcase your personality
- SPC(Stone polymer composite) core:** Prevent expansion and contraction of the flooring cover sub-floor imperfection
- EVA(Ethylene-vinyl acetate) Foam Pad Optional:** Better sound absorption and excellent underfoot feeling



## BRAND - QUIKLOCK®

## Technical Specifications

Applications	Grade	Appearance	Viscosity@ 150°C	Glue Pot Temperature	Softening Point
SPC Flooring /Sheets	CH-9028 L12 FR	Transparent Light Yellow Bricks	15000 ± 3000 cps	140 - 180 °C	95 ± 3 °C
	CH-9028 L12 W	Transparent White Bricks	15000 ± 3000 cps	160 - 180 °C	107 ± 3 °C


### Characteristics

- Suitable for lamination of S.P.C. core to IXPE foam of S.P.C. floor assembly
- Strong bonding results in higher production
- Fast melting Characteristics

## LAMINATION WAX



### WAD Fixing

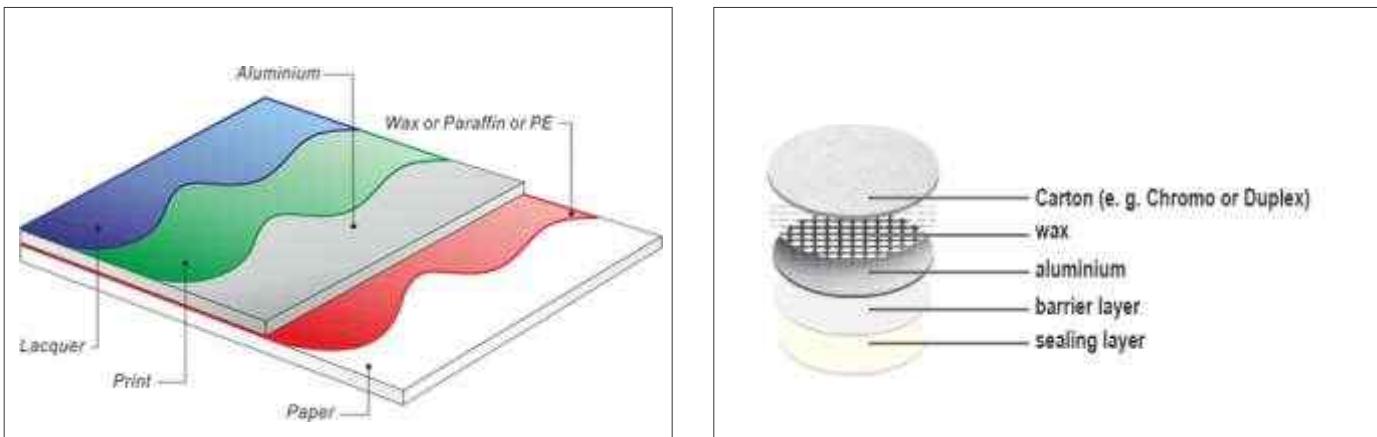

### Lamination Wax

#### Lamination wax for WAD/Induction Sealing

- Gives good bond between foil and board.
- Gives complete Delamination of foil from bond during induction process.

#### GEO - Textile

- Suitable for bonding between HDPE film and PP non woven
- Gives flexible coating with higher coverage.


#### Hot Foil Stamping

- Suitable for Foil Stamping.
- Higher coverage

BRAND - QUIKLOCK®			Technical Specifications			
Applications	Grade	Characteristics	Appearance	Viscosity @ 150°C	Glue Pot Temperature	Softening Point
Wax for WAD Making	CH-800 W 15H	Good bond with board in case of lamination wax CH - 800 W.	White After Melting	30 ± 20 cps	120°C- 150 °C	75 ± 2 °C
	CH-800W 15HR			60 ± 20 cps	90°C- 120 °C	103°C ± 3 °C
Shrink Label Tubes	CH-LS 30	Suitable for Sealing of open mouth of PET Bottle to Al Foil. It will also used for making of shrink label tubes.	Light Yellow Granules	1800 ± 300 cps	140 - 160 °C	80 ± 5 °C
Hot Foil Stamping	CH-150	Suitable for Foil Stamping.	Light Yellow Granules	5000 ± 1000 cps	140 - 160 °C	80 ± 5 °C
Hot Melt For Soap & Chewing Gum Wrapper	SWC-25	Good bonding B/W Paper to polyester Merges with paper colour & give good appearance	Cream Granules	2500+ 5000 cps	125 - 140 °C	100 ± 5 °C
	LH-30					

## NOTES

## NOTES

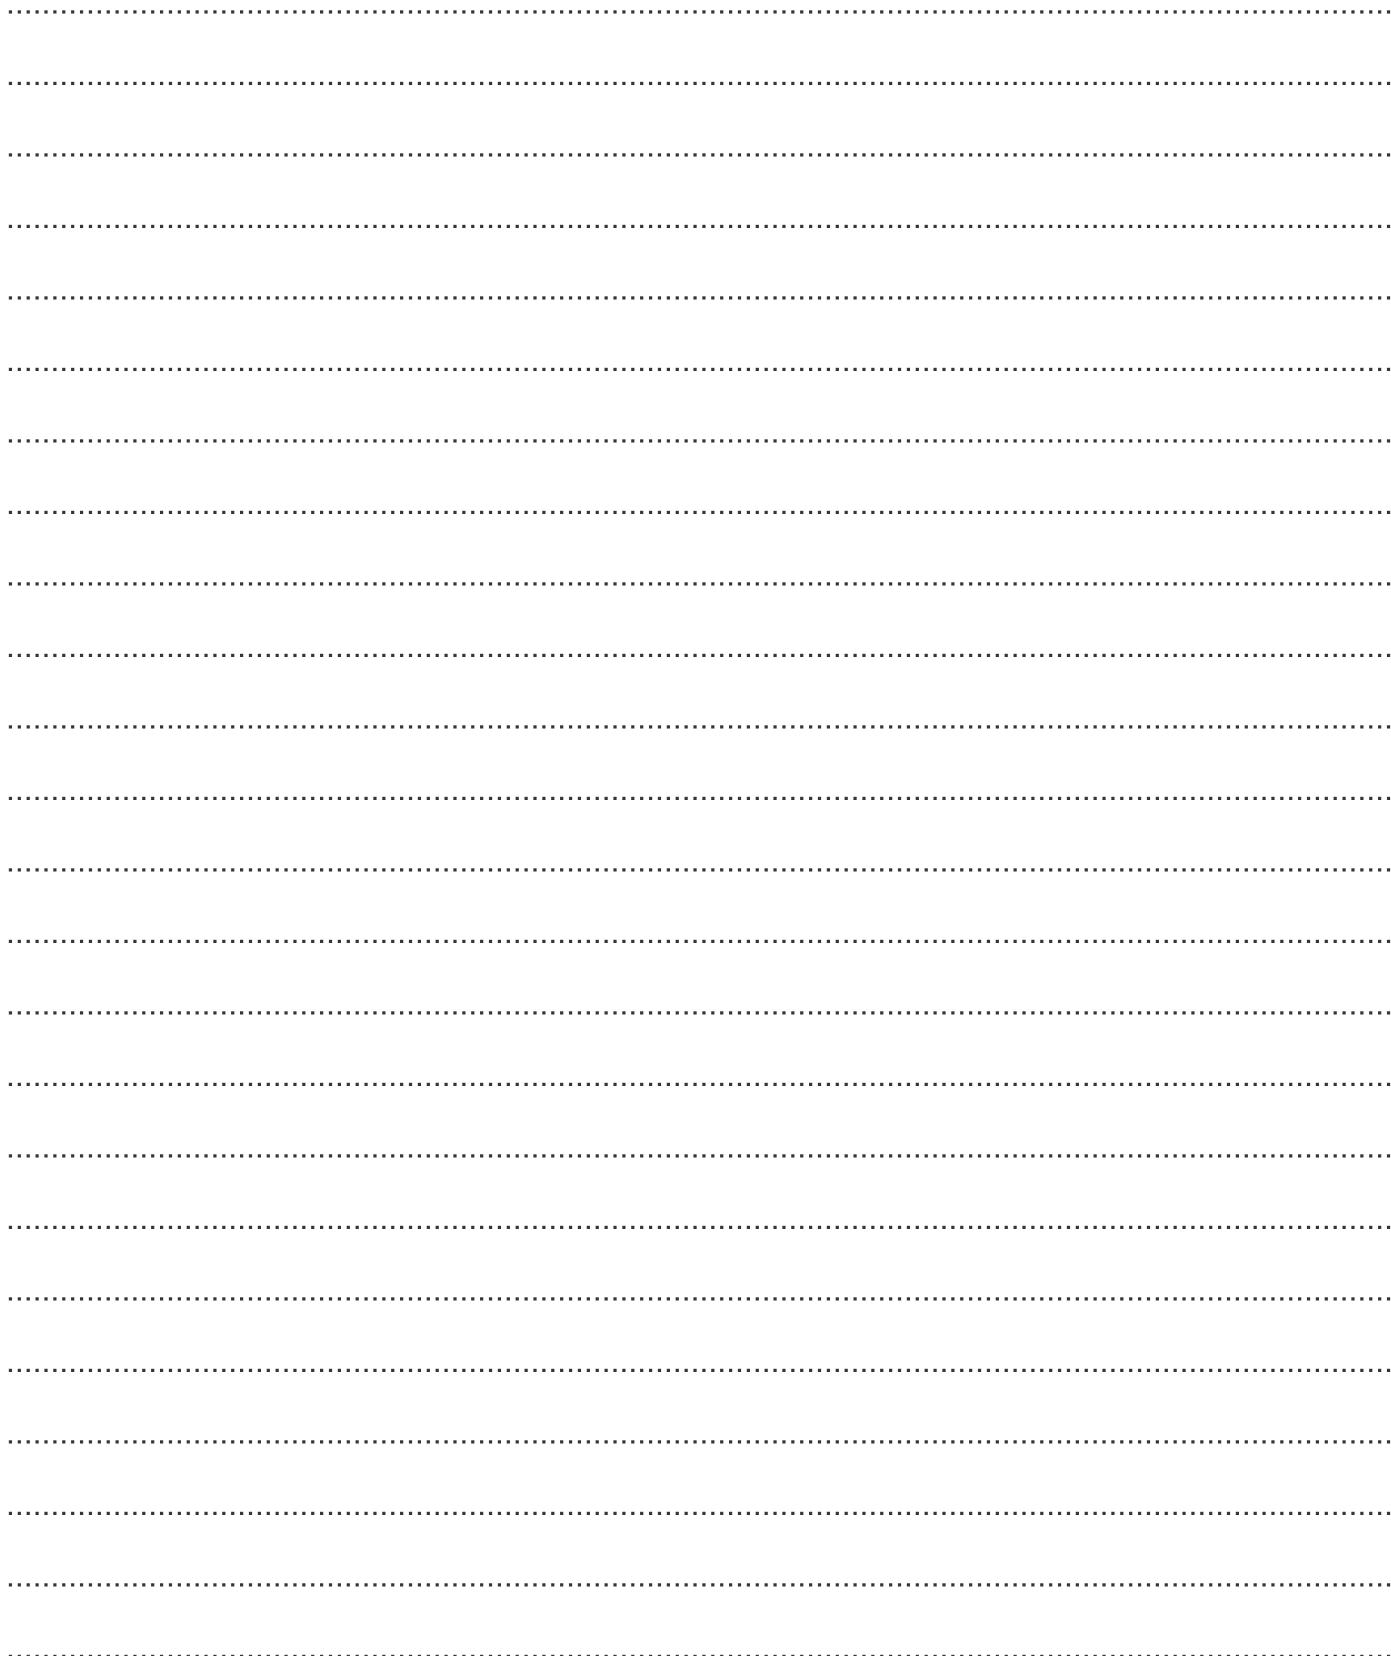



## Chemline India Ltd.

F-1, Sarda Chamber-1, Central Market,

Prashant Vihar, Rohini,

Delhi-110085 (INDIA)

Ph : +91-11-27555999 (6 Lines)

Fax : +91-11-27555992

Website : [www.chemlineglobal.com](http://www.chemlineglobal.com)

### For Barrier Coatings & Papers/Boards Products :

[barrierpapersales@chemlineglobal.com](mailto:barrierpapersales@chemlineglobal.com)

### Enquiry For Bottle Labelling :

[sales@chemlineglobal.com](mailto:sales@chemlineglobal.com)

### For Graphic Arts Products :

[sales2@chemlineglobal.com](mailto:sales2@chemlineglobal.com)

### For Flexible Packaging Products :

[sales3@chemlineglobal.com](mailto:sales3@chemlineglobal.com)

### For Speciality Hotmelts :

[hmsales@chemlineglobal.com](mailto:hmsales@chemlineglobal.com)

### For Label Stocks

[labelstocks@chemlineglobal.com](mailto:labelstocks@chemlineglobal.com)

### Enquiry from Countries other than India :

[exports@chemlineglobal.com](mailto:exports@chemlineglobal.com)

### Other Miscellaneous Mails :

[info@chemlineglobal.com](mailto:info@chemlineglobal.com)